

# T8088 AG-BAGGER



**Featuring a 104-inch Rotor, 10- or 12-foot Tunnel,  
and Anchor Position Control. No Backstop or Cables Used.**

The T8088 Pull-Type Ag-Bagger features anchor position control, the industry's widest 104-inch Revolutionary Rotor, a powerful sweeping tunnel cleanout, and a 10- or 12-foot tunnel. The T8088 is our largest model in the T-Series Product Line, and it is built to provide the operator with greater capacity, additional storage on feed pad, and better Ag-Bagging Experience.




## T8088 Ag-Bagger Features:



### Anchor Position Control

Two anchors and wheel braking system provide resistance resulting in a dense forage pack within the Ag-Bag. Anchors can be adjusted within the bag for maximum compaction.

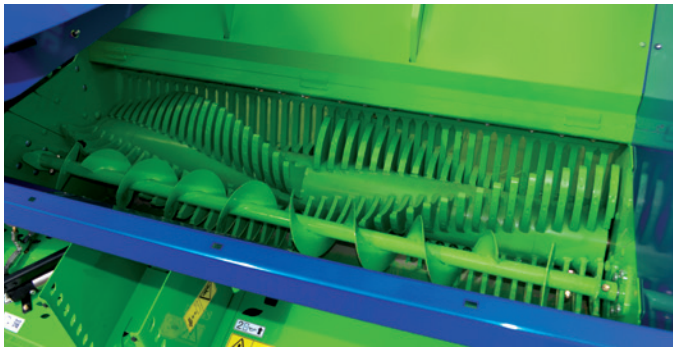

### 104-inch Revolutionary Rotor

Our widest T-Series rotor with rotor teeth from edge to edge resulting in a consistent forage flow for faster unloading.



### 10- or 12-foot Tunnel with No Backstop

T8088 is equipped with either a 10- or 12-foot tunnel and can handle 500-foot bags increasing storage capacity up to 1000 tons per Ag-Bag. No backstop or cable drums used.

**Better Storage  
Better Forage**

## T8088 Specifications:

FEATURE	T8088
<b>DRIVE</b>	
Driveline	1000-RPM Planetary Driveline
Drive Chain	Double 120 Roller Chain
Rotor Width	104 in.
Number of Rotor Teeth	156
Rows of Rotor Teeth	3 – Revolutionary
Rotor Bearings (Both Sides)	Footed Spherical 3-7/16 in.
Jackshaft Size and Bearings (Both)	Footed Spherical 3-7/16 in.
<b>CONVEYOR</b>	
Single Wide Chain Conveyor with CA550 Chain	Standard
Hydraulic Conveyor Lift	Standard
<b>HYDRAULICS</b>	
Self-Contained Hydraulics	Standard
External Reservoir	Standard
Hydraulic Jack System	Standard
<b>COMPACTION SYSTEM</b>	
Anchor Position Control	Standard – Two steel anchors
Anchor Travel Distance	0 to 6 ft. – Infinite Adjustment
Wheel Brakes	Standard – Hyd Disc Brake
Brake Hand Pump	Standard
Maximum Ag-Bag Length	500 ft.
<b>TUNNELS AND EXTENSIONS</b>	
10 ft. Tunnel Top	Yes – Interchangeable
12 ft. Tunnel Top	Yes – Interchangeable
10 ft. x 40 in. Tunnel Extension	Standard with 10 ft. Tunnel Top
12 ft. x 40 in. Tunnel Extension	Standard with 12 ft. Tunnel Top
Sweeping Tunnel Cleanout	Standard
<b>BAG BOOM AND CRADLE</b>	
Bag Boom with Brake Style Winch	Standard
Bag Cradle with Tunnel Lift Capability	Standard
<b>INOCULANT APPLICATION</b>	
Dry or Liquid	Optional
<b>SPECIFICATIONS</b>	
Overall Width (Transport)	8 ft. 6 in.
Overall Width (Ag-Bagging)	18 ft.
Overall Length (Transport)	22 ft.
Overall Length (Ag-Bagging) (approx)	13 ft. w/o Ext, 16 ft. 4 in. w/ Std Ext
Overall Transport Height (for farm)	12 ft. 6 in.
Overall Transport Height (from factory)	10 ft. 6 in.
Overall Weight (with 12 ft. Tunnel, approx)	13,500 lbs
Tongue Weight (with 12 ft. Tunnel, approx)	1,800 lbs (Transport)
Horsepower Minimum	150 hp
Horsepower Maximum	220 hp

208 River Knoll Drive  
Mayville, WI 53050  
1-800-334-7432  
[www.ag-bag.com](http://www.ag-bag.com)

